




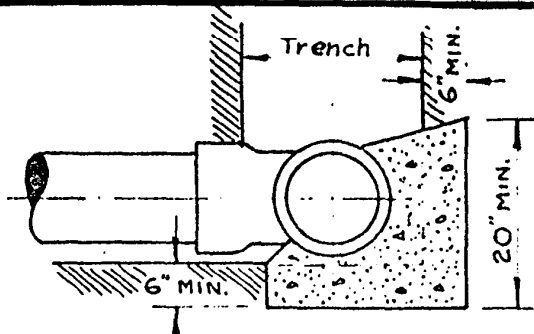


SECTION A-A

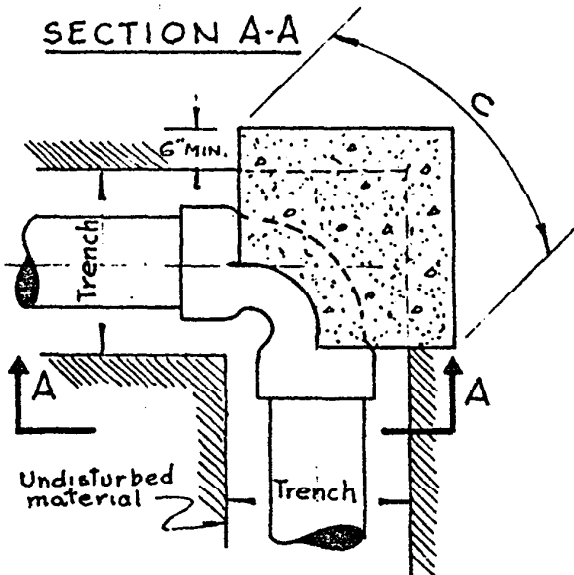

BEND

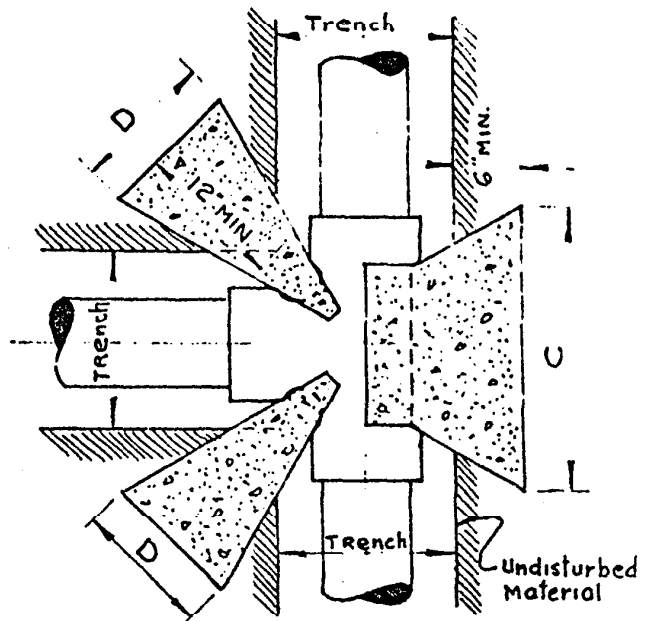

TEE

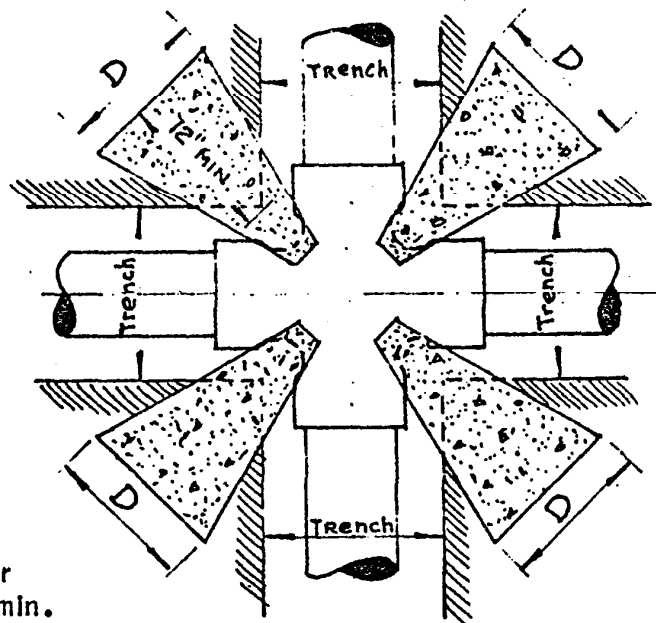

CROSS

NOTES:

1. All concrete shall be 2500 psi, California State Standard.
2. A min. of 24 hours curing time required for concrete thrust blocks before any water should be introduced into pipe line and a min. of 7 days curing time before pressure test.
3. Pour against undisturbed material - back & bottom.
4. All blocks to be kept clear of lugs and nobs.
5. Unsupported surfaces to be formed.
6. Letters C and D on details refer to required bearing area. See

COUNTY OF COLUSA

DEPARTMENT OF PUBLIC WORKS

TITLE

THRUST BLOCKS FOR
A.C.P. MAINS

STANDARD NO.

S-31

SCALE: NONE