


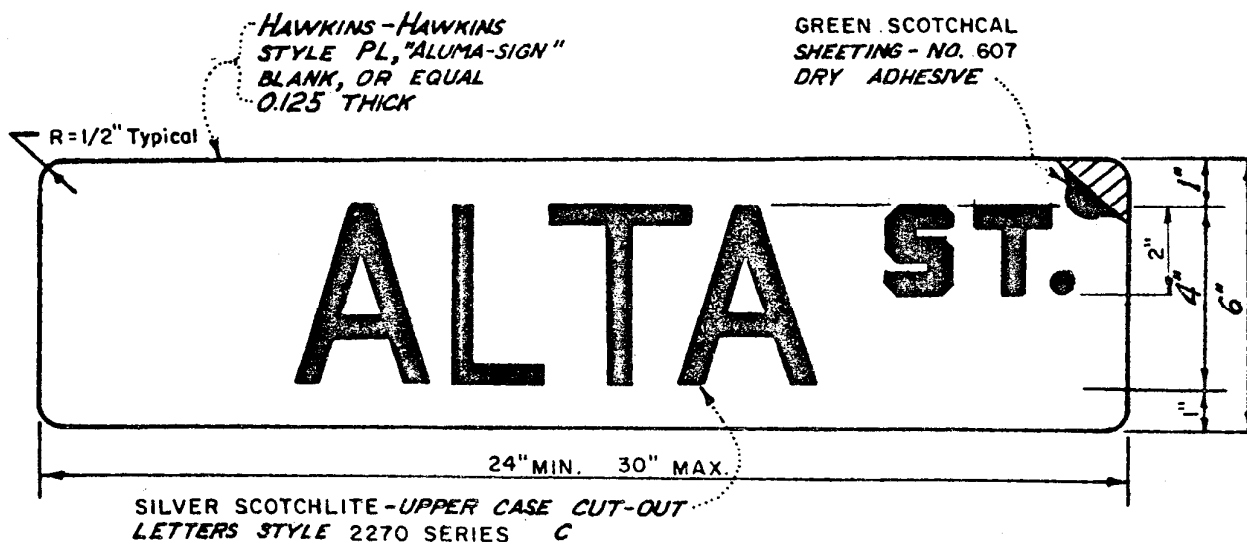

NOTES:

1. REFLECTIVE LETTERS SHALL BE MECHANICALLY APPLIED PER MANUFACTURER'S SPECIFICATIONS.
2. SIGNS SHALL BE PRINTED ON BOTH SIDES.
3. HARDWARE FOR MOUNTING SIGNS SHALL BE HAWKINS-HAWKINS, V14(HD)SL-105 CROSS PIECE AND V14(HD)SL-2C-CAP, POST CAP, OR EQUAL.
4. SIGNS SHALL BE MOUNTED ON 2" I.D. GALV. PIPE SET 3 FT. IN GROUND, 8 FT. OFF THE TRAVELED WAY WITH THE BASE OF THE SIGN 7 FT. ABOVE THE EDGE OF THE TRAVELED WAY.
5. ALLEN HEAD SET SCREWS AFFIXING THE SIGN TO THE HARDWARE & CAP TO THE PIPE SHALL BE TIGHTENED.
6. SEE STD. POST DETAIL DRAWING.
7. CENTER LETTERS ON SIGN AND LEAVE 1/2" MIN. MARGIN ON BOTH ENDS.

COUNTY OF COLUSA	
DEPARTMENT OF PUBLIC WORKS - ENGINEERING	
STANDARD COUNTY ROAD SIGN	
	Drwg. No.
	S-12